



New York



London



Moscow



Tokyo



# tesa® ACX<sup>plus</sup> MULTI-PURPOSE (MP) FOR INDUSTRIAL DISTRIBUTION


## The New tesa® ACX<sup>plus</sup> Multi-Purpose (MP) Tapes

- ... are **true all-rounders** within the famous tesa® ACX<sup>plus</sup> assortment, specifically designed for industrial distributors and converters
- ... are equipped with **high viscoelasticity properties** and **excellent adhesion levels**
- ... can **absorb and dissipate stress** and **compensate the thermal elongation** of bonded parts
- ... are the **ideal go-to solution** for a wide range of multi purpose bonding applications



# MULTI-PURPOSE MOUNTING AT ITS BEST

The new tesa® ACX<sup>plus</sup> Multi-Purpose (MP) assortment is a true all-rounder and one of our most popular lines for industrial distributors and converters. Due to their high viscoelasticity and excellent adhesion levels, the acrylic core tapes can absorb and dissipate stress and compensate the thermal elongation of bonded parts. They can be used for a wide range of multi-purpose bonding applications.

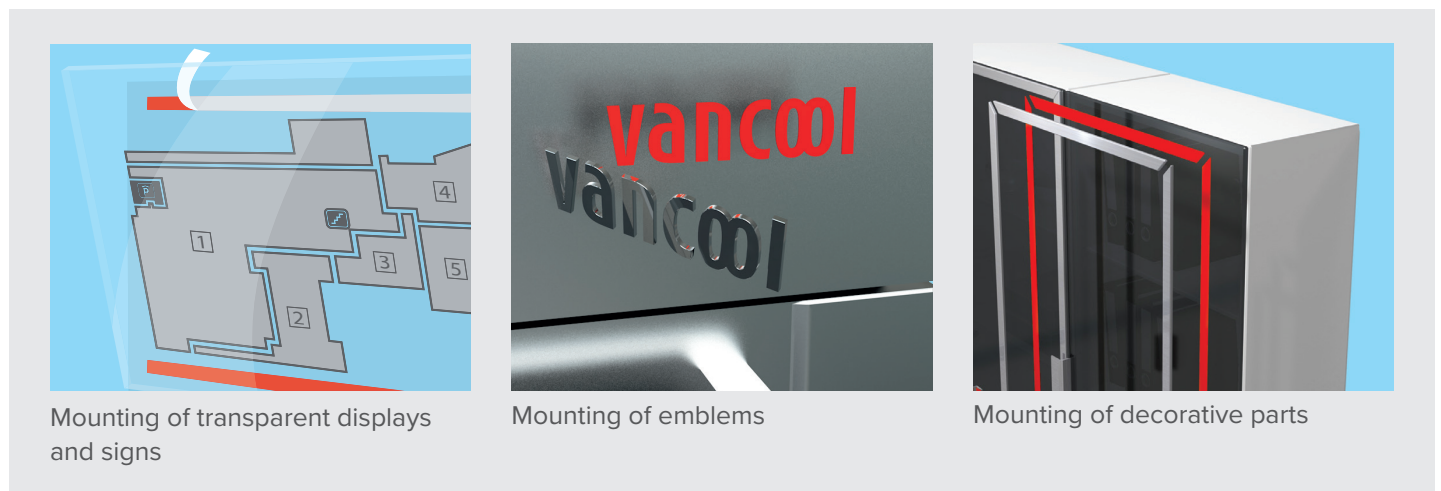

## Product features

Due to their well balanced technical properties, our new tesa® ACX<sup>plus</sup> Multi-Purpose (MP) products fit to a wide range of bonding applications:

- Excellent adhesion levels
- Very good stress dissipation due to viscoelastic behaviour
- Compensation of thermal elongation

## Technical data

Product	Total thickness [µm / mil]	Type of liner	Type of adhesive	Type of backing	Adhesion to steel * [N/cm / oz/in]	Adhesion to aluminium * [N/cm / oz/in]	Temperature resistance short term [°C / °F]	Color
tesa® 7272	640 / 25.2	PV44: White filmic liner – branded	Pure acrylic	Foamed acrylic	27 / 246.7	33 / 301.5	200 / 392	Gray
tesa® 7273	800 / 31.5	PV44: White filmic liner – branded	Pure acrylic	Foamed acrylic	28 / 255.8	35 / 319.8	200 / 392	Gray
tesa® 7274	1,100 / 43.3	PV44: White filmic liner – branded	Pure acrylic	Foamed acrylic	32 / 292.4	31 / 283.2	200 / 392	Gray

\* After 3 days

## United States and Canada

tesa tape, inc.  
 5825 Carnegie Boulevard  
 Charlotte, NC 28209  
 Phone: +1-800-426-2181  
 Email: [customer care@tesatape.com](mailto:customer care@tesatape.com)

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.