




tesa® 755xx transfer tape assortment for lamination and converting applications

Our tesa® 755xx transfer tapes are a versatile, multi-purpose assortment for lightweight mounting and lamination applications.

- **Very good initial adhesion** to a wide variety of surfaces
- Temperature, humidity and age **resistant**
- Developed with our **proven** tesa® 4965 adhesive

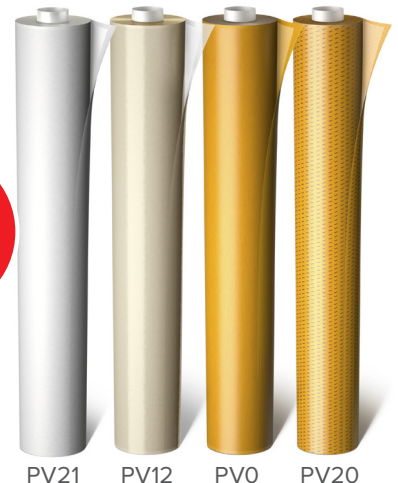

PV21

PV12

PV0

PV20

Durable and conformable for lamination and mounting

Application areas

- Lamination of lightweight parts and materials
- Lamination of foams, felts, fabrics, flexible films and textiles
- Lamination of flooring systems
- Membrane switch mounting
- Lamination of insulation materials
- Splicing


Product features

- Highly conformable transfer tape design, suitable for a wide range of applications
- Very good initial adhesion to a wide variety of materials, including LSE surfaces
- High durability and very good temperature and humidity resistance
- Excellent die-cutting properties


References for applications



Lightweight mounting

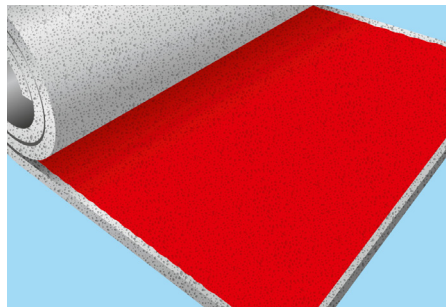

Foam lamination

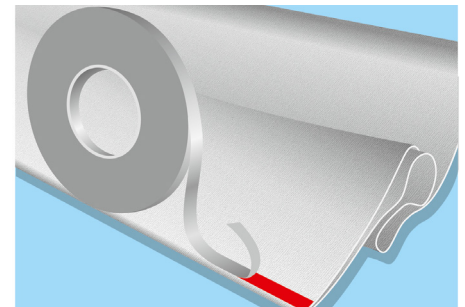

Fabric and textile mounting

Product / NART	Backing	Type of adhesive	Color	Total thickness [µm / mils]	Type of Liner	Thickness of liner [µm / mils]	Adhesion to steel [N/cm, oz/in]*	Adhesion to PE [N/cm, oz/in]*	Dimension [m:mm, yds:in]
75505-60000-20	None	Tackified acrylic	Transparent	50 / 2	Glassine, branded	70 / 2.8	8.5 / 777	3.5 / 31.9	200 : 1372 219 : 54
75505-60000-21	None	Tackified acrylic	Transparent	50 / 2	Glassine, white, non-branded	78 / 3.1	8.5 / 777	3.5 / 31.9	200 : 1372 219 : 54
75505-60000-12	None	Tackified acrylic	Transparent	50 / 2	PET	75 / 3	8.5 / 777	3.5 / 31.9	200 : 1372 219 : 54
75507-60000-20	None	Tackified acrylic	Transparent	75 / 3	Glassine, branded	70 / 2.8	11 / 100.5	4.5 / 41.1	200 : 1372 219 : 54
75507-60000-21	None	Tackified acrylic	Transparent	75 / 3	Glassine, white, non-branded	78 / 3.1	11 / 100.5	4.5 / 41.1	200 : 1372 219 : 54
75507-60000-12	None	Tackified acrylic	Transparent	75 / 3	PET	75 / 3	11 / 100.5	4.5 / 41.1	200 : 1372 219 : 54
75507-60000-00	None	Tackified acrylic	Transparent	75 / 3	Glassine, non-branded	70 / 2.8	11 / 100.5	4.5 / 41.1	300 : 1372 328 : 54
75515-60000-20	None	Tackified acrylic	Transparent	125 / 5	Glassine, branded	70 / 2.8	12 / 109.6	6 / 54.8	200 : 1372 219 : 54
75515-60000-12	None	Tackified acrylic	Transparent	125 / 5	PET	75 / 3	12 / 109.6	6 / 54.8	200 : 1372 219 : 54

United States and Canada

tesa tape, inc.

4235 S Stream Boulevard

Charlotte, NC 28217

+1-800-426-2181

customer@tesatape.com

tesatape.com

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.

* After 14 days