



tesa® 755xx transfer tape
assortment for lamination
and converting applications

Our new tesa® 755xx transfer tape assortment: The perfect allrounder transfer tapes for versatile multipurpose lightweight mounting and lamination applications

- **Suitable for a wide range of applications** due to its very good initial adhesion to a wide variety of surfaces
- **High durability** – it is temperature, humidity and age resistant
- Equipped with our **proven and well-known** tesa® 4965 adhesive



Durable and conformable for all kinds of lamination and mounting tasks

Application areas

- Lamination of lightweight parts and materials
- Lamination of foams, felts, fabrics, flexible films and textiles
- Lamination of flooring systems
- Membrane switch mounting
- Lamination of insulation materials
- Splicing


Product features

- Highly conformable transfer tape design, suitable for a wide range of applications
- Very good initial adhesion to a wide variety of materials, including LSE surfaces
- High durability and very good temperature and humidity resistance
- Excellent die-cutting properties

References for applications



Lightweight mounting

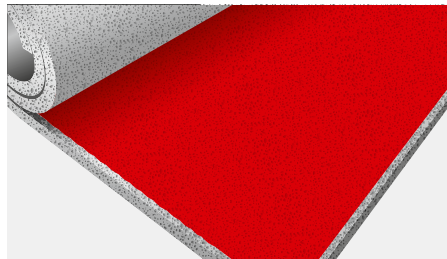

Foam lamination



Fabric and textile mounting

Technical data

| Product / NART | Backing | Type of adhesive | Color | Total thickness [μm] | Type of Liner | Thickness of liner [μm] | Adhesion to steel [N/cm] | Adhesion to PE [N/cm] | Dimension [m:mm] |
|--------------------------------|---------|-------------------|-------------|----------------------|------------------------------|-------------------------|--------------------------|-----------------------|------------------|
| 75505-60000-20 | None | Tackified acrylic | Transparent | 50 | Glassine, branded | 70 | 8.5 | 3.5 | 200:1372 |
| 75505-60000-21 | None | Tackified acrylic | Transparent | 50 | Glassine, white, non branded | 78 | 8.5 | 3.5 | 200:1372 |
| 75505-60000-12 | None | Tackified acrylic | Transparent | 50 | PET | 75 | 8.5 | 3.5 | 200:1372 |
| 75507-60000-20 | None | Tackified acrylic | Transparent | 75 | Glassine, branded | 70 | 11 | 4.5 | 200:1372 |
| 75507-60000-21 | None | Tackified acrylic | Transparent | 50 | Glassine, white, non branded | 78 | 11 | 4.5 | 200:1372 |
| 75507-60000-12 | None | Tackified acrylic | Transparent | 75 | PET | 75 | 11 | 4.5 | 200:1372 |
| 75507-60000-00 | None | Tackified acrylic | Transparent | 75 | Glassine, non branded | 70 | 11 | 4.5 | 300:1372 |
| 75515-60000-20 | None | Tackified acrylic | Transparent | 125 | Glassine, branded | 70 | 12 | 6 | 200:1372 |
| 75515-60000-12 | None | Tackified acrylic | Transparent | 125 | PET | 75 | 12 | 6 | 200:1372 |

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.

tesa SE

Phone: +49 40 88899 0

tesa.com/company/locations